
PAWAN T series suction guns are designed to handle yarns at very high speeds (upto 8000 mtr/min) for POY / FDY application. Various models available for handling variety of yarn sizes.



SPECIFICATIONS

TYPE OF SUCTION GUN	T500	T750	T1000
APPLICATION	POY/FDY		
OPERATING PRESSURE	6-14 BAR (kg/cm2)		
YARN SPEED RANGE	8000 mtr/min		
YARN COUNT POSSIBILITIES	1600 (dtex)	3200 (dtex)	10000 (dtex)
WORKING PRINCIPLE	TWISTING		
AIR SUPPLY CONNECTION	25 mm ID HOSE		
AIR EXHAUST CONNECTION	32 mm ID HOSE		
AIR CONSUMPTION	52(BAR+1) m3/hr.		
OVERALL DIMENSION	402X85X42 mm		
WEIGHT(WITHOUT HOSE)	1.2 kg	1.3 kg	1.4 kg

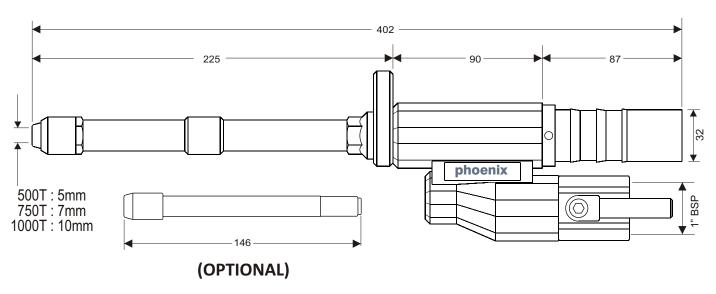

Other modifications on request

REPLACEMENT FOR HEBERLEIN HS5 / HS7 / HS10