


PAWAN U series is a modified version of PAWAN S series of suction guns. With a new configuration of nozzle & chamber, the performance equivalent to PAWAN S is achieved with about 20% less air consumption. PAWAN U guns are widely used on high speed spinning machines (upto 5500 mtr/min). Various models available for handling variety of yarn size & speed.

PAWAN 750U



SPECIFICATIONS

OPERATING PRESSURE : 5-10 BAR (kg/cm ²)
YARN SPEED RANGE : upto 5500 mtr/min
YARN COUNT POSSIBILITIES : 3200 (dtex)
WORKING PRINCIPLE : TWISTING
AIR SUPPLY CONNECTION : 20 mm ID HOSE
AIR EXHAUST CONNECTION : 30 mm ID HOSE
AIR CONSUMPTION : 38(BAR+1) m ³ /hr.
OVERALL DIMENSION : 396X75X42 mm
WEIGHT (WITHOUT HOSE) : 1.20 kg

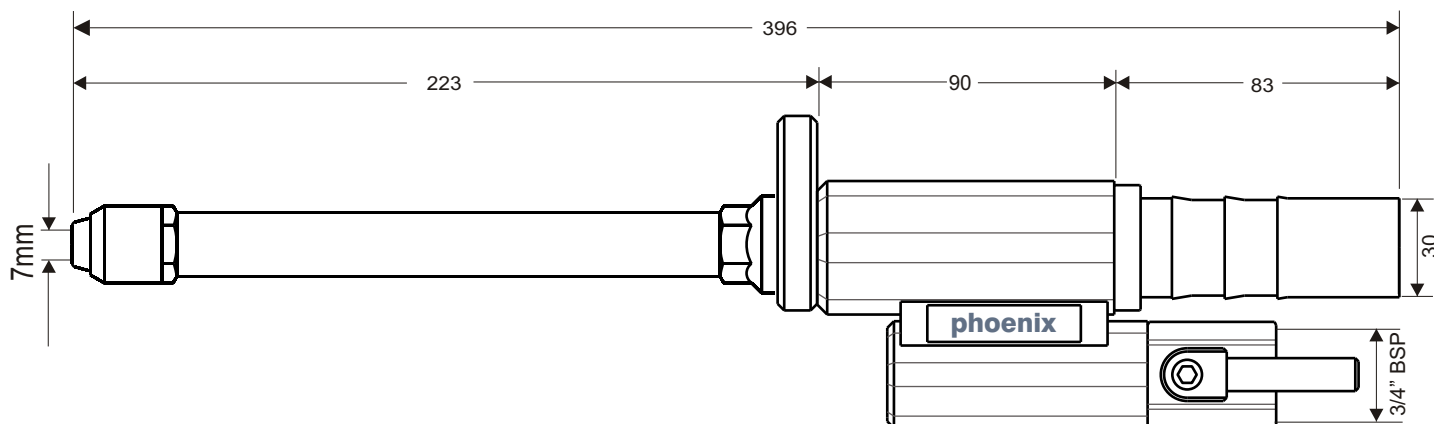

Other modifications on request

REPLACEMENT FOR : HEBERLEIN LC7