


PAWAN S series suction guns are most commonly used in synthetic yarn industry for string-up & doffing on winders. They are designed for handling yarn upto 5500 mtr/min. Various models are available to cater the requirement of total yarn size & speed.

PAWAN 500S
PAWAN 750S
PAWAN 1000S



SPECIFICATIONS

TYPE OF SUCTION GUN	S500	S750	S1000
APPLICATION	POY		
OPERATING PRESSURE	6-12 BAR (kg/cm ²)		
YARN SPEED RANGE	5500 mtr/min		
YARN COUNT POSSIBILITIES	1600 (dtex)	3000 (dtex)	6000 (dtex)
WORKING PRINCIPLE	TWISTING		
AIR SUPPLY CONNECTION	20 mm ID HOSE		
AIR EXHAUST CONNECTION	30 mm ID HOSE		
AIR CONSUMPTION	38(BAR+1) m ³ /hr.		
OVERALL DIMENSION	396X85X42 mm		
WEIGHT (WITHOUT HOSE)	1.1 kg	1.2 kg	1.3 kg

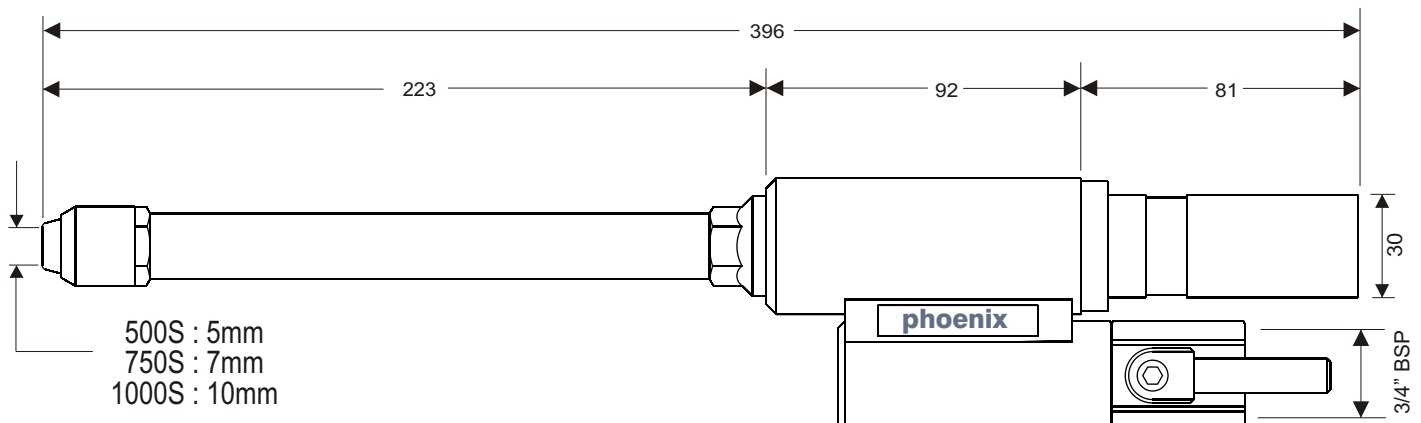

Other modifications on request

REPLACEMENT FOR : K600/5, /7, /10